

# AD-HTS648



## USB/Ethernet RF Handover Test System

64-Attenuation Channels : 8-Outputs, 95dB, 500-6000 MHz, 0.25dB Step size

### Specifications

Attenuation Step Size (dB)	0.25				
Number of individually controlled RF chains	64				
Enclosure	5U Rackmount				
Connectors	SMA Female or N Female				
Operating Frequency (Mhz)	500 - 6,000				
Attenuation Range (dB)	0 - 95				
Input 0.1dB Compression Power (dBm)	34				
Impedance ( $\Omega$ )	50				
IP3 Input (dBm) <sup>1</sup>	+58				
Attenuation Accuracy (dB)	50 - 2000 MHz	Frequency	Conditions	Typical	Max
		0.25 - 20		$\pm 0.25$	$\pm (5.5\% \text{ of Atten.} + 0.25)$
		20.25 - 60		$\pm 0.50$	$\pm (2.0\% \text{ of Atten.} + 0.90)$
	2000 - 4000 MHz	60.25 - 90		$\pm 0.75$	$\pm (3.5\% \text{ of Atten.} + 0.70)$
		0.25 - 20		$\pm 0.20$	$\pm (5.5\% \text{ of Atten.} + 0.25)$
		20.25 - 60		$\pm 0.30$	$\pm (2.0\% \text{ of Atten.} + 0.70)$
	4000 - 6000 MHz	60.25 - 90		$\pm 0.40$	$\pm (3.0\% \text{ of Atten.} + 0.90)$
		0.25 - 20		$\pm 0.15$	$\pm (6.5\% \text{ of Atten.} + 0.15)$
		20.25 - 60		$\pm 0.35$	$\pm (3.5\% \text{ of Atten.} + 0.45)$
60.25 - 90		$\pm 0.65$	$\pm (3.5\% \text{ of Atten.} + 0.90)$		
Dwell Time per Channel (ms) <sup>2</sup>	1				
Min. Dwell Time for all Channels (ms) <sup>3</sup>	2				
Attenuation Transition Time (ns) <sup>4</sup>	325				
VSWR	< 2.0 : 1 (all states)				
Max Input RF Power (dBm)	+28				
Power Source	AC/DC Adapter (5V / 3A) Power Over Ethernet (PoE) (IEEE802.3at Class 2 compliant)				
Power Use (A)	1.2				
Operating Temperature ( $^{\circ}\text{C}$ )	0 to 40				
Communication <sup>5</sup>	USB (Hybrid Serial COM Port and HID) Ethernet (Telnet, HTTP, HTTP Web GUI, DHCP & Static IP) Manual keypad panel				
Power Divider Isolation (dB)	21				
Insertion Loss (dB)		Typical	Max		
	50 MHz	8.6	12.6		
	2400 MHz	10.9	14.2		
	6000 MHz	13.8	16.2		

<sup>A</sup> Exceeding absolute maximum ratings may cause permanent damage. Operation should be restricted to the limits in the Operating Ranges table.

Operation between operating range maximum and absolute maximum for extended periods may reduce reliability.

<sup>B</sup> Attenuator RF ports are interchangeable bidirectional signal transmission.

<sup>1</sup> Tested with 10 kHz span between signals.

<sup>2</sup> Dwell Time per Channel is the time it will take an individual attenuator channel to transition to a new attenuation state (without PC communication delays).

<sup>3</sup> Minimum Dwell Time for All Channels is the time it takes all channels to transition to a new attenuation state (without PC communication delays).

<sup>4</sup> Attenuation Transition Time is the time it takes an attenuator to reach a new attenuation state.

<sup>5</sup> USB support for simultaneous HID and Serial connections.

# AD-HTS648




## USB/Ethernet RF Handover Test System

64-Attenuation Channels : 8-Outputs, 95dB, 500-6000 MHz, 0.25dB Step size


### Drawing

- Units in inches (in)
- Depth: 24.00
- Connectors: N or SMA

#### FRONT VIEW

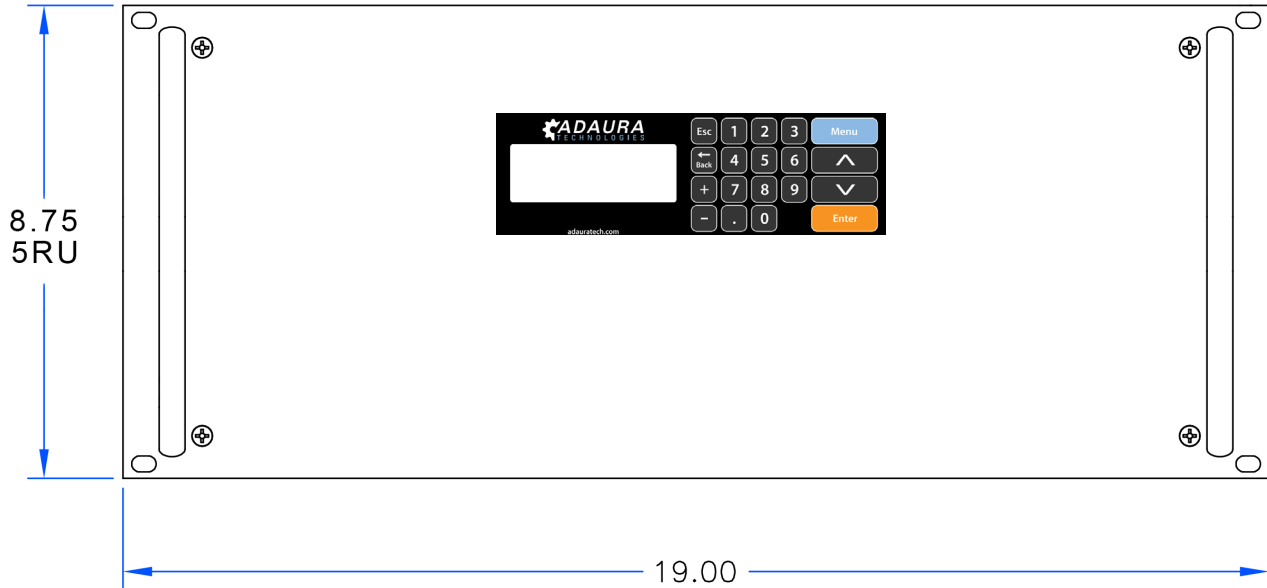

#### REAR VIEW

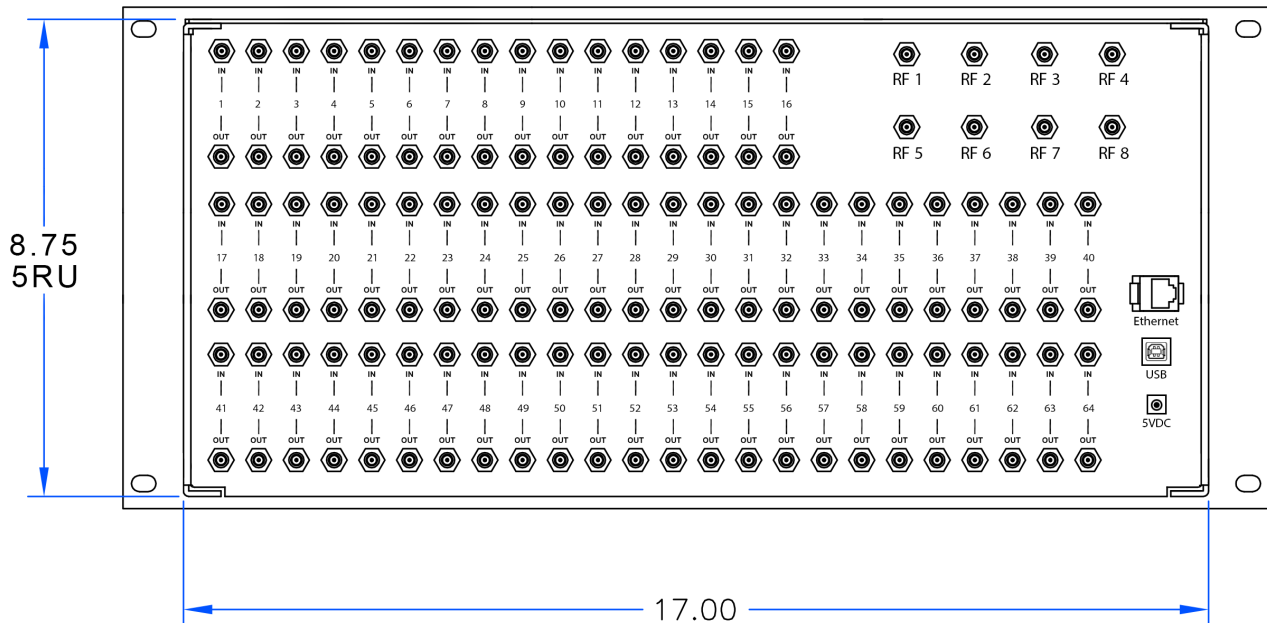

# AD-HTS648



## USB/Ethernet RF Handover Test System

64-Attenuation Channels : 8-Outputs, 95dB, 500-6000 MHz, 0.25dB Step size

### Block Diagram

