

AD-HTS8X8



USB/Ethernet RF Handover Test System

8-Input : 64-Attenuation Channels : 8-Outputs, 95dB, 500-6000 MHz, 0.25dB Step size

Specifications

Attenuation Step Size (dB)	0.25				
Number of individually controlled RF chains	64				
Enclosure	5U Rackmount				
Connectors	SMA or N				
Operating Frequency (MHz)	500 - 6,000				
Attenuation Range (dB)	0 - 95				
Input 0.1dB Compression Power (dBm)	34				
Impedance (Ω)	50				
IP3 Input (dBm) ¹	+58				
Attenuation Accuracy (dB)	Frequency	Conditions	Typical	Max	
		50 - 2000 MHz	0.25 - 20	± 0.25	$\pm (5.5\% \text{ of Atten.} + 0.25)$
			20.25 - 60	± 0.50	$\pm (2.0\% \text{ of Atten.} + 0.90)$
	60.25 - 90		± 0.75	$\pm (3.5\% \text{ of Atten.} + 0.70)$	
	2000 - 4000 MHz	0.25 - 20	± 0.20	$\pm (5.5\% \text{ of Atten.} + 0.25)$	
		20.25 - 60	± 0.30	$\pm (2.0\% \text{ of Atten.} + 0.70)$	
		60.25 - 90	± 0.40	$\pm (3.0\% \text{ of Atten.} + 0.90)$	
	4000 - 6000 MHz	0.25 - 20	± 0.15	$\pm (6.5\% \text{ of Atten.} + 0.15)$	
		20.25 - 60	± 0.35	$\pm (3.5\% \text{ of Atten.} + 0.45)$	
60.25 - 90		± 0.65	$\pm (3.5\% \text{ of Atten.} + 0.90)$		
Dwell Time per Channel (ms) ²	1				
Min. Dwell Time for all Channels (ms) ³	2				
Attenuation Transition Time (ns) ⁴	325				
VSWR	< 2.0 : 1 (all states)				
Max Input RF Power (dBm)	+28				
Power Source	AC/DC Adapter (5V / 3A) Power Over Ethernet (PoE) (IEEE802.3at Class 2 compliant)				
Power Use (A)	1.2				
Operating Temperature ($^{\circ}\text{C}$)	0 to 40				
Communication ⁵	USB (Hybrid Serial COM Port and HID) Ethernet (Telnet, HTTP, HTTP Web GUI, DHCP & Static IP) Manual Keypad Panel				
Power Divider Isolation (dB)	21				
Insertion Loss (dB)		Typical	Max		
	50 MHz	13	18		
	2400 MHz	16	21		
	6000 MHz	18	23		

^A Exceeding absolute maximum ratings may cause permanent damage. Operation should be restricted to the limits in the Operating Ranges table.

Operation between operating range maximum and absolute maximum for extended periods may reduce reliability.

^B Attenuator RF ports are interchangeable bidirectional signal transmission.

¹ Tested with 10 kHz span between signals.

² Dwell Time per Channel is the time it will take an individual attenuator channel to transition to a new attenuation state (without PC communication delays).

³ Minimum Dwell Time for All Channels is the time it takes all channels to transition to a new attenuation state (without PC communication delays).

⁴ Attenuation Transition Time is the time it takes an attenuator to reach a new attenuation state.

⁵ USB support for simultaneous HID and Serial connections.

AD-HTS8X8




USB/Ethernet RF Handover Test System

8-Input : 64-Attenuation Channels : 8-Outputs, 95dB, 500-6000 MHz, 0.25dB Step size


Drawing

- Units in inches (in)
- Depth: 24.00
- Connectors: N or SMA

FRONT VIEW

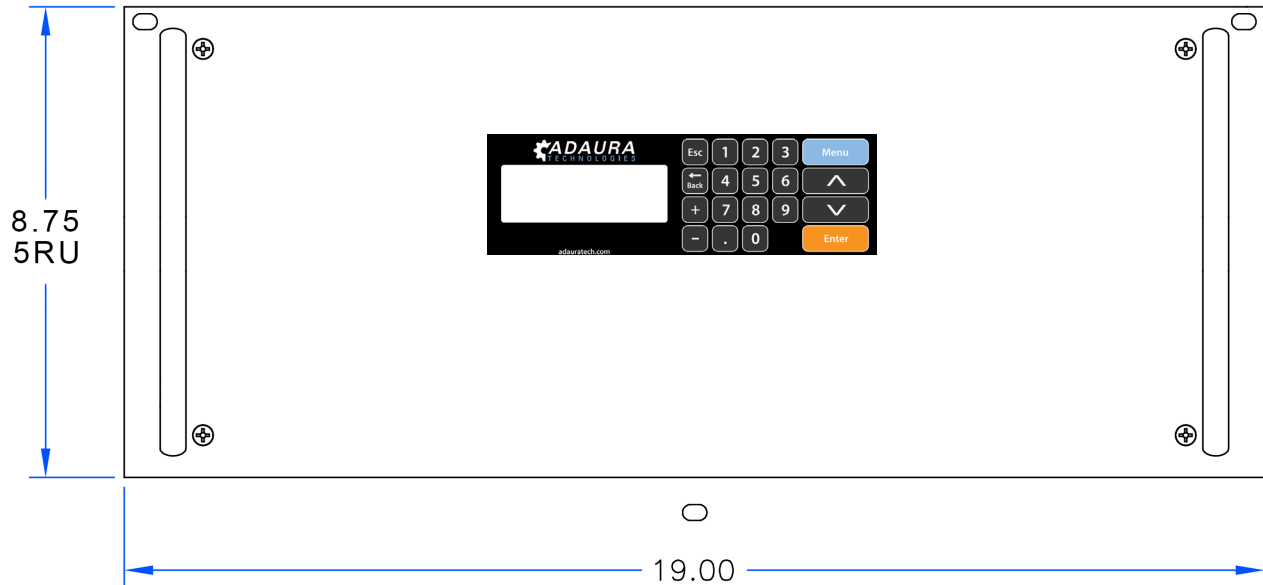

REAR VIEW

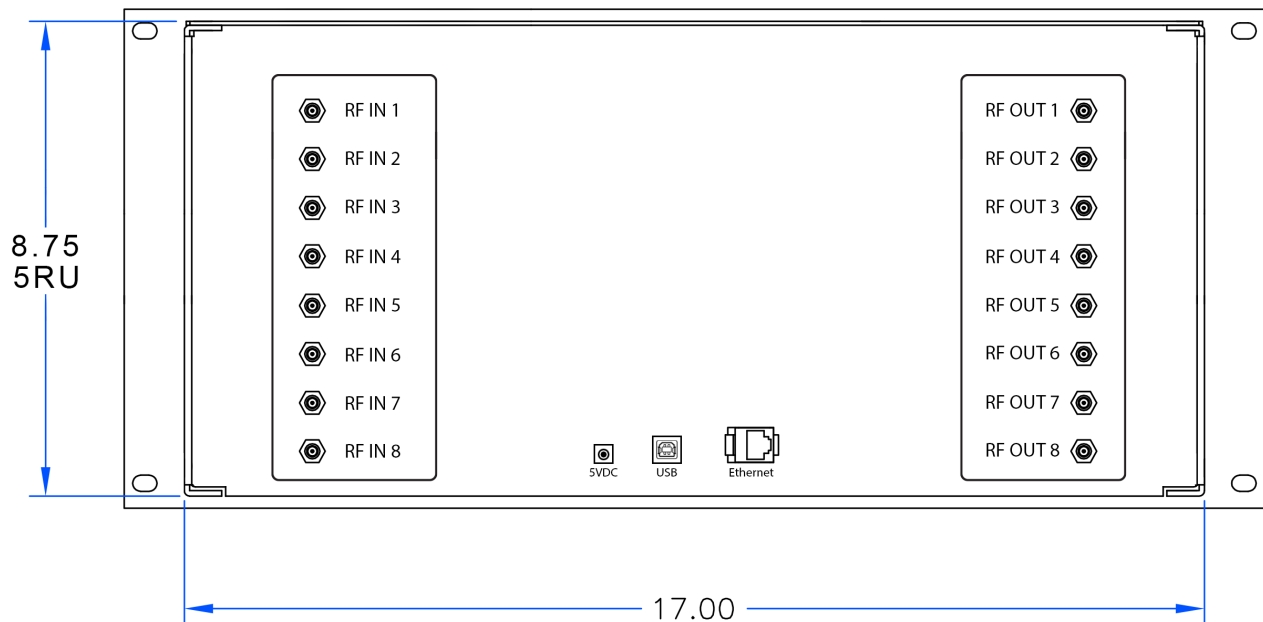

AD-HTS8X8



USB/Ethernet RF Handover Test System

8-Input : 64-Attenuation Channels : 8-Outputs, 95dB, 500-6000 MHz, 0.25dB Step size

Block Diagram

